



Shown With Optional Dipping Cabinet

Item No.

CO43 Continuous Dispensing Custard Freezer

Features

Offer premium frozen custard, low overrun ice cream, or sorbet in three separate flavors.

Mix Hopper

Three, 30 quart (28.4 liter). Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C).

Indicator Lights

Lights indicate when mix is low in the hopper.

Product Chute

Ribbon of frozen product flows down chute to separate dipping cabinet. Easily removable for cleaning or moving dipping cabinet.

Mix Flow Regulator

Convenient dials with easy to read markings allow operator to adjust the correct amount of mix flowing into freezing cylinder for proper consistency.

Safety Features

To protect users from accidental injury:

- Beater motor will not rotate unless door is in place.
- Finger guards installed in opening of dispensing door.




Rockton, Illinois 61072 **800-255-0626** Phone 815-624-8333 Fax 815-624-8000 **www.taylor-company.com** e-mail: info@taylor-company.com

International Office Taylor Company S.r.I. Roma, Italy Tel: **+39-06-420-12002** Fax: +39-06-420-12034 e-mail: romeoff@taylor-company.com

ISO 9001:2000 Registered Firm

CO43Continuous Dispensing Custard Freezer

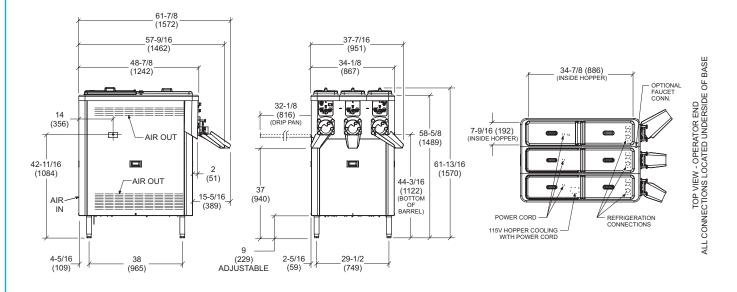

NOTE: FIGURES IN PARENTHESES INDICATE MILLIMETERS

Weights	lbs.	kgs.
Net	943	427.7
Crated	1091	494.9
	cu. ft.	cu. m.
Volume	98.5	2.8

Dimensions	in.	mm.
Width	34-1/8	867
Depth	48-7/8	1242
Height	59	1499
Floor Clearance	9 Adjustable	198

*Mounted on standard legs

Electrical Three Dedicated	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) ity Wires (W)	
Connections				
208-230/60/3 Air	15 Maximum	7 Minimum	3P 4W Poles (P)	
One Dedicated Connection	Fuse Size	Circuit Ampacity	Wires (W)	
115/60/1 Air	15	7	2P 3W	

This unit may be manufactured in other electrical characteristics. Refer to the local Taylor Distributor for availability.

(For exact electrical information, always refer to the data label of the unit.)

Bidding Specs						
Electrical: Volt			Hz		ph	
Neutral: 🗆	Yes	□No	Cooling:	🗆 Air	□ Water	\Box NA

Options:

G043



Specifications

Electrical

Four dedicated electrical connections are required. See the Electrical chart for the proper electrical requirements. Dispensing electrical connections may be permanently connected. Hopper cooling is cord connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

Beater Motor

Three, 2.0 HP.

Refrigeration System

Requires three remote condensing units (Taylor Model RC35 required for warranty coverage.

Separate Hopper Refrigeration (SHR)

One, 1,500 BTU/hr. R404A.

(BTUs may vary depending on compressor used.) Requires separate 115 volt power supply, cord connected.

Clearance

Minimum Clearance of 3" (76 mm) on left and rear, and 0" on right side. Allow 3 feet (914 mm) in the rear for service access.

Options

- Dipping Cabinet (Consult your local Taylor distributor)
- Dipping Well (Consult your local Taylor distributor) • •
 - Faucet
- Remote Condensing Systems RC35 three (3) required

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Taylor Company, A Division of Carrier Commercial Refrigeration. Inc. Rockton, Illinois 61072 815-624-8333 800-255-0626 Fax 815-624-8000 www.taylor-company.com